

TECHNICAL DATA SHEET

DESCRIPTION

When looking for performance combined with the intention to respect the environment, look no farther than our innovative Lead series. Made of recycled non-woven synthetic fibres, these underlayments were specially designed for double-guled down engineered wood flooring.


COMPATIBILITY

ADHESIVE

AD-844 MS
AD-532+

FLOORING

Engineered wood floor

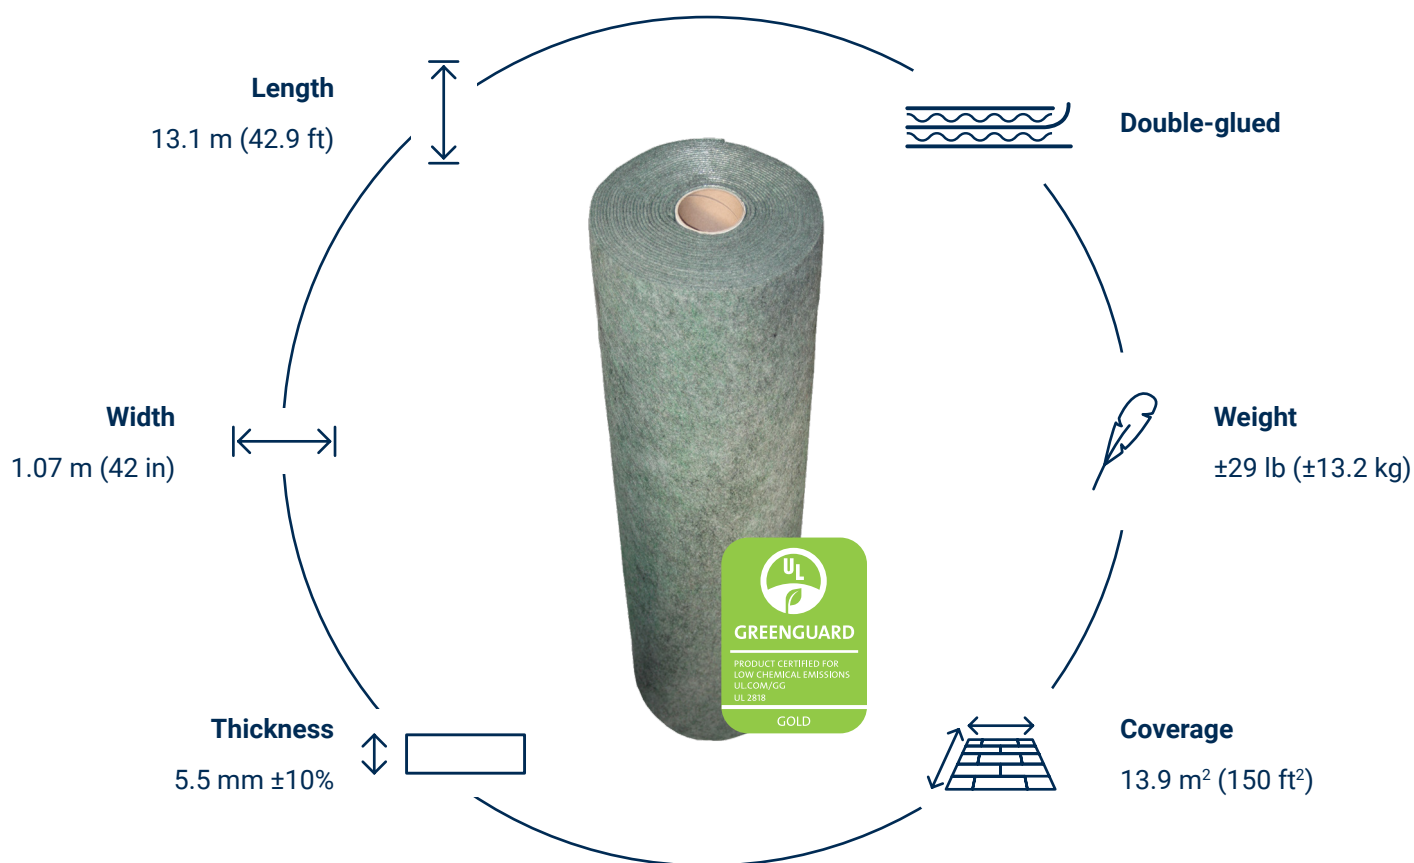

TECHNICAL DATA SHEET

PERFORMANCE TABLE

Test	Suspended ceiling	Structure	Flooring type	Installation	Acoustic performance	Acoustic comfort
T.143.4	Yes	Concrete 9"	Engineered	Double-glued	AIIC: 69	A-HIIC: 69
T.54.6	No	Concrete 8"	Engineered	Double-glued	IIC: 59	HIIC: 66
T.205.8	No	Concrete 8"	Engineered	Double-glued	AIIC: 58	A-HIIC: 59
T.10	N/A	Hambro D500 - 3,5" Concrete	Engineered	Double-glued	AIIC: 58	A-HIIC: 68

PHYSICAL PROPERTIES

Type of fibre	Needle-punched recycled polyester
Type of film	Needle-punched recycled polyester
VOC	0 g/L
Moisture	Rot-resitant
Flammability	1 (National Fire Protection Association. NFPA)
Length	13.1 m (42.9 ft)
Width	1.07 m (42 in)
Thickness	6 mm \pm 10%
Weight	\pm 29 lb (\pm 13.2 kg)
Coverage	13.9 m ² (150 ft ²)

TECHNICAL DATA

PERM (vapor barrier) ASTM E96	N/A
R factor ASTM C518	0.693
R factor of the assembly ASTM C518	1.571 without floor covering
Robinson ASTM C-267	N/A
Grab tensile strength CAN-148.1 - no 7.3	1800 N \pm 5%
Grab tensile elongation CAN-148.1 - no 7.3	75% to 120%
"Mullen" bursting CAN-4.2 - no 11.1	N/D
Trapezoidal tear CAN-4.2 - no 12.1	880 N \pm 5%
Reflectivity	70%



IRREGULAR
AIR CELLS



INSTALLATION WITH
ENGINEERED FLOORING



LIGHT



NO VOC



EASY TO INSTALL



EASY TO GLUE



COMPATIBLE WITH
HEATED FLOORS