

# TECHNICAL DATA SHEET


## DESCRIPTION

AD-860 is a fast-set, 100% solids, moisture-cure adhesive that is designed for glue-assist hardwood installation and basic wood-subfloor construction, as well as for wood-flooring repair, bonding of wood-stair nosings, wood molding, baseboards and tack-strip attachment to concrete subfoors.

## COMPATIBILITY

### FLOORING

Engineered wood floor  
Hardwood

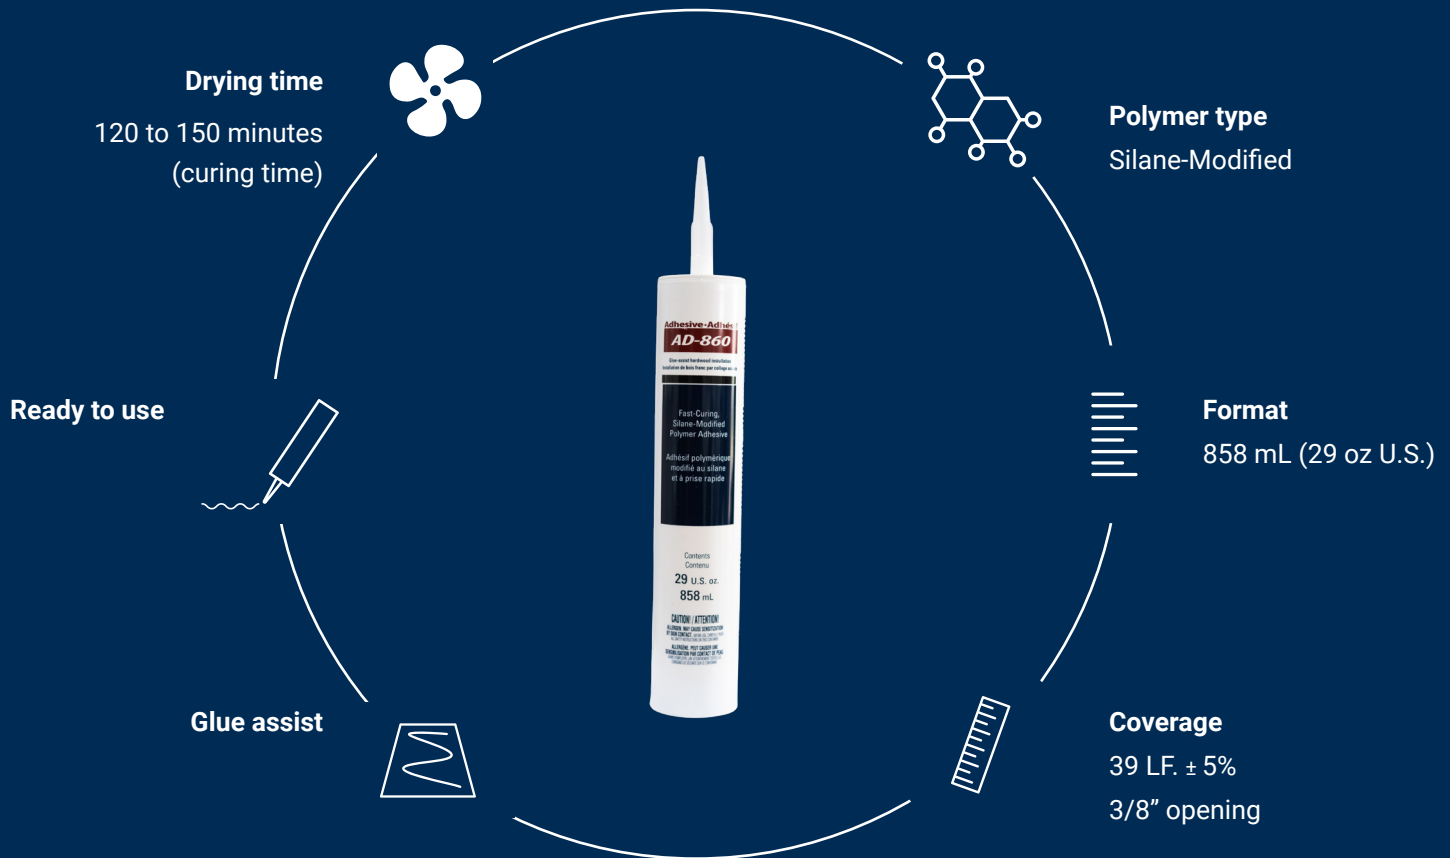

# TECHNICAL DATA SHEET

## PRODUCT PERFORMANCE PROPERTIES

<b>Polymer type</b>	Silane-modified
<b>Solids content</b>	100%
<b>VOC</b>	< 20 g/L
<b>Density</b>	1,53 g per mL (12,9 lb per U.S gal.)
<b>Flash point</b>	> 93 °C (200 °F)
<b>Elongation</b>	> 200%

## SHELF LIFE AND PRODUCT CHARACTERISTICS

<b>Shelf life</b>	12 months when stored in original, unopened packaging at 73°F (23°C)
<b>Consistency</b>	Smooth paste
<b>Color</b>	White
<b>Service temperature range</b>	-23 °C to 93 °C (-10 °F to 200 °F)
<b>Curing time</b>	120 to 150 minutes
<b>Storage conditions</b>	10 °C to 32 °C (50 °F to 90 °F)

EASY TO  
CLEANLOW  
ODORFAST  
DRYINGCONSULT THE  
INSTRUCTIONSEASY  
TO APPLYHIGH PERFORMANCE  
PRODUCT